

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER

11721US02

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/857096

INTERNATIONAL APPLICATION NO.

PCT/US99/28801

INTERNATIONAL FILING DATE

3 DECEMBER 1999

PRIORITY DATE CLAIMED

4 DECEMBER 1998

TITLE OF INVENTION

METHOD AND APPARATUS FOR REPLACING LOST PSTN DATA IN A PACKET NETWORK

APPLICANT(S) FOR DO/EO/US

KENNEY, John B.

SCHAFFER, R. Michael

MAGILL, Robert B.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail EL567394436US
23. ☒ Other items or information: RETURN POSTCARD

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/857096	INTERNATIONAL APPLICATION NO. PCT/US99/28801	ATTORNEY'S DOCKET NUMBER 11721US02
--	--	--

24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :				CALCULATIONS PTO USE ONLY	
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$690.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	19 - 20 =	0	x \$18.00	\$0.00	
Independent claims	4 - 3 =	1	x \$80.00	\$80.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$770.00	
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$770.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$770.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$770.00	
				Amount to be: refunded	\$
				charged	\$

a. ☒ A check in the amount of **\$770.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **13-0017** A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO: <div style="border: 1px solid black; padding: 10px; min-height: 150px;"> <p>LARSON, Ronald E. McAndrews Held & Malloy, Ltd. 500 W. Madison, 34th Floor Chicago, Illinois 60661 Phone: 312-775-8000 Fax: 312-775-8100</p> </div>	<div style="text-align: center;"> </div> <p>SIGNATURE</p> <p>Ronald E. Larson</p> <p>NAME</p> <p>24,478</p> <p>REGISTRATION NUMBER</p> <p>May 31, 2001</p> <p>DATE</p>
---	---

Method and Apparatus for
Replacing Lost PSTN Data in a Packet Network

BACKGROUND OF THE INVENTION

The present invention relates to replacement of data lost or corrupted in a packet network. In particular, the present invention relates to a method and apparatus using selectable replacement data generators to replace lost PSTN data in a packet network.

Modern communications networks carry staggering amounts of data generated by numerous and diverse information sources.

The Public Switched Telephone Network (PSTN) (which is a Time Division Multiplex (TDM) communications network) carries, for example, digital data representing voice signals and digital data produced by faxes and MODEMs. Furthermore, the data may travel over any number of varied networks in route from the information source to the information destination, with each network incorporating divergent topologies and routing protocols.

Some networks divide data traffic into discrete packets which are referred to as "frames", "packets", or "cells", depending on the particular network. As an example, an Asynchronous Transfer Mode (ATM) network is one of the many network solutions currently available. An ATM network supports high speed data transfers by dividing the data into individual "cells". An ATM network cell is 53 bytes long and includes 48 information bytes and 5 network control bytes. It

- 2 -

is often possible to link two or more dissimilar networks with an interworking device.

For example, an ATM network may accept, through an interworking device, a synchronous byte stream of digitized voice or MODEM data from a local PSTN or Public Branch Exchange (PBX) that may, for example, connect directly to a local loop and home telephone lines. The ATM network groups these bytes into cells, and routes the packetized data over high speed ATM links to a destination. At the destination, the ATM network interfaces, for example, with a PSTN through an interworking device. The interworking device accepts the asynchronous stream of packets and converts this data to a synchronous stream of bytes to be delivered to the PSTN network. An ATM to PBX interworking function may be provided, for example, by a Tellabs AN2100 multiplexer, available from Tellabs, Inc., Lisle IL.

Many network protocols include provisions for determining when cells or packets are lost or corrupted. In ATM networks that carry cells created by the ATM Adaptation Layer 1 protocol (AAL1), for example, one of the information bytes is an information control byte that includes a 3-bit sequence number that is incremented each time a new cell is sent over the network. A receiver may then detect a missing cell by monitoring the sequence number. For example, receiving a sequence of cells 1,2,4,5 reveals that cell 3 has been lost.

In order to maintain bit count integrity in the PSTN network, a substitution function in the interworking device at the ATM network destination typically inserts dummy data in

place of the missing cell. The amount of dummy data inserted is equal to the amount of data carried by the lost cell, for example, an ATM cell using AALI may carry 47 bytes of data. The substitution function typically takes one of three approaches to generating dummy data: inserting silence, inserting white noise, or inserting (repeating) previous data. The type of dummy data that the substitution function inserts is of particular importance when the dummy data is communicated out to the PSTN (and connected phone lines, fax machines, and MODEMs).

Inserting silence may be implemented by using a single, constant value as the dummy data for each byte in a lost or corrupted cell. The silence results because a series of constant values has a predominately DC (i.e., zero frequency) component. The DC component is filtered out by the CODECs (which typically roll off in frequency response below 300 Hz and above 3400 Hz, with severe attenuation at approximately 0 Hz or DC) that convert the PSTN data to analog form for reproduction at a telephone receiver.

Inserting silence often has undesirable effects when the series of constant values makes its way back out to the PSTN, however. For instance, if the dummy data forms part of a digitized voice conversation, the constant values manifests themselves as complete silence at a PSTN receiver. Complete silence makes a telephone call sound as if the line has gone dead or has otherwise been disconnected. Furthermore, if the dummy data forms part of a voiceband data connection (for a fax machine, for example), then complete silence may be

interpreted as a disconnection or loss of carrier by a receiving fax machine. Thus a MODEM or fax machine may "drop out", i.e., drop a connection, or otherwise lose the ability to transmit or receive data on the connection when it receives inserted silence.

In the past, one method for repeating old data simply replayed a single piece of old data, for example, the last cell successfully received. Inserting a single cell of old data may cause audible false tones or frequency components, particularly if more than a few sequential cells are lost and the same old cell is repeated more than a few times.

Inserting white noise is a third option available to a substitution function. A generally accepted definition of white noise is that a white noise signal consists of samples whose values are uncorrelated with one another. In other words, the given sample value cannot be predicted with any additional accuracy even given a complete knowledge of all past and future samples. Noise substitution in general has been proposed, for example, in the American Nation Standards Institute (ANSI) T1 standard T1.312 of 1991. The T1 standard specifies a set of 16 noise power levels that should be used, but does not provide any method for generating noise of any type.

White noise substitution provides a sound similar to the background static sound familiar from periods of silence during phone conversations or loss of radio or television reception. The static sound reinforces the perception during a phone call, for example, that the connection is still intact

(that the line has not gone dead). Ideal white noise produces energy in all frequency bands and MODEM and fax machines typically interpret a received signal with energy at a particular frequency with a predetermined range as a live connection. Thus, regardless of the particular frequency or frequency band in which a MODEM expects to find energy representing a live connection, that energy may be provided by white noise substitution. Inserting white noise with more than the threshold amount of energy therefore prevents, in many instances, MODEMs and fax machines from terminating a connection.

One past approach to generating white noise has centered around real-time speech coding. In J.F. Lynch Jr. et al., *Speech/Silence Segmentation for Real-Time Coding Via Rule Based Adaptive Endpoint Detection*, ICASSP '87, 1348-1351 (1987) (the "ICASSP paper"), the authors propose a general speech coding scheme. The coding scheme includes a receiver that reconstructs speech by decoding speech segments and that reconstructs silence with a noise substitution process controlled through amplitude and duration parameters. The noise substitution process in the ICASSP paper uses a 18th order polynomial to generate a spectrally flat pseudo-random bit sequence that is filtered to match the mean coloration of acoustical background noise.

The ICASSP paper proposes a set of production rules that generate a single scalar quantity called a noise metric that indicates the current level of background noise. At the receiver, a binary shift register produces a binary sequence

that is modulated with the noise metric to produce noise at the amplitude of the original background noise. In addition, the modulated output is passed through a low pass filter to shape the simulated noise to approximate the average

5 "coloration" of the background noise. The approach in the ICASSP paper thus does not provide an independent mechanism for manipulation of the output noise power level. Rather, the output noise amplitude is responsive to a mechanism that is required to generate a noise metric. Furthermore, the ICASSP
10 paper requires an output low pass filter to further shape the output noise appropriately for merging with decoded speech segments.

15 A need exists in the industry for a method and apparatus for replacing lost PSTN data in a packet network, including flexible and efficient mechanisms for lost data substitution and white noise generation.

BRIEF SUMMARY OF THE INVENTION

5 It is an object of the present invention to provide a method and apparatus for replacing lost PSTN data in a packet network.

It is another object of the present invention to provide a lost data substitution method.

10 Yet another object of the present invention is to provide a lost data substitution method that uses an extended data buffer which provides replacement data and that minimizes false tones or spurious frequency components in the data communicated to the PSTN.

15 It is an object of the present invention to provide a variable power white noise generator for use with modern networking components.

It is another object of the present invention to provide a variable power white noise generator that provides direct control over the white noise output power.

20 A further object of the present invention is to use a linear feedback shift register in a lost data substitution device to provide a pseudo-random white noise output.

25 Another object of the present invention is to generate white noise at a power level suitable to maintain fax, MODEM, and data connections.

Another object of the present invention is to generate white noise at a power level suitable to indicate a live telephone connection.

A still further object of the present invention is to provide an interworking unit including multiple distinct data replacement generators, each of which may be selected according to a replacement data selection input.

5 The present invention provides a method and apparatus for replacing lost PSTN data in a packet network and for generating variable power white noise. In one embodiment, the method for replacing data includes the steps of receiving data packets, detecting lost data packets, and producing in
10 response a lost data output indicating when replacement data needs to be provided.

15 The method may then generate replacement data by re-using data stored in an extended playback buffer (with the re-used replacement data starting with the oldest output data byte stored in the extended playback buffer), and placing the re-used replacement data on an external network when the lost data output indicates replacement data needs to be provided. Alternatively, other replacement data generators may provide the replacement data. For example, a variable power white
20 noise generator or a silence generator may provide the replacement data.

25 Another aspect of the invention is a variable power white noise generator including, for example, a multi-bit register storing a magnitude, and a pseudo-random sign bit generator for changing the positive and negative sense of the magnitude.

As one example, the multi-bit register may be implemented as an 8-bit register with one sign bit and seven magnitude bits to represent values from -127 to +127. Alternately, larger or

smaller registers may be used as well as alternate predetermined number formats, for example, two's complement representation.

In one preferred embodiment, the variable power white noise generator uses a linear feedback shift register (LFSR) including n bit positions. The LFSR is connected to a feedback network which corresponds to a polynomial generating function. The generating function preferably produces a pseudo-random output sequence of length $2^n - 1$. The pseudo-random output sequence of the LFSR may then provide the pseudo-random sign bit which controls the positive and negative sense of the magnitude bits. For example, the sign bit may be placed in a sign bit location in the multi-bit register or otherwise combined with the magnitude in downstream processing.

The output of the multi-bit register provides a white noise output of variable power by changing the value stored in the magnitude bits. The white noise output may then be used, for example, to fill in missing data in an output data stream and the power may be adjusted to a predetermined level for voice conversations and a second predetermined level for data communications, or for finer control, the power level may be determined adaptively for a particular connection. Several independent multi-bit registers or LFSRs may be provided to handle numerous independent output data streams.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates one embodiment of a Linear Feedback Shift Register (LFSR) suitable for use in a variable power white noise generator.

Figure 2 shows an LFSR and multi-bit output register used to provide a variable power white noise output.

Figure 3 shows one example of a bank of white noise generators used to provide independent variable power white noise outputs for multiple independent output data streams. Note that only one LFSR is needed for the entire bank of white noise generators.

Figure 4 shows a block diagram of an interworking unit including lost packet detection and replacement data generation functions.

DETAILED DESCRIPTION OF THE INVENTION

Turning now to Figure 4, that figure shows a block diagram of an interworking function 400. The interworking function 400 includes a lost packet detection unit 402 connected to a data processing unit 404. Also included is a replacement data unit 406 connected to a data playout unit 408. It is noted that one or more of the interworking blocks 402-408 shown in Figure 4 may be implemented in a single ASIC, PLD, or the like, or alternatively with discrete circuitry, or software.

The lost packet detection unit 402 receives a packet stream S_i , (i.e., packet data for connection i), as an input. The lost packet detection unit 402 examines each packet in the stream S_i to determine when packets are missing (for example, by checking sequence numbers), corrupted (for example, by checking error correcting codes), not available when needed (for example, by checking a received data queue size), or otherwise require substitution with replacement data. The lost packet unit 402 indicates when replacement data is needed by asserting or deasserting one or more signals L_i .

The packet stream S_i is also connected to the data processing unit 404. In the data processing unit 404, packet overhead bytes are removed and the remaining data, D_i , is processed and forwarded to the data playout unit 408. The overhead bytes typically represent information such as sequence numbers (in ATM networks in particular), but may also include any overhead information added to a packet including

- 12 -

error correcting codes, source/destination routing information, and the like.

When replacement data is not needed (as indicated by L_i), the data playout unit 408 places the data D_i on the PSTN in particular time slots according to PSTN standards. It is noted, however, that the present invention is not limited to interworking with the PSTN. Rather, the interworking device 400 and data playout unit 408 may connect to virtually any destination network provided that the data playout unit 408 appropriately formats the data according to the standards for that destination network. When L_i indicates that replacement data is needed, however, the data playout unit 408 places the replacement data R_i on the PSTN instead of the data D_i . The replacement data R_i may be provided by the data replacement unit 406 or the data playout unit 408.

The data replacement unit 406 or the data playout unit 408 may include several distinct replacement data generators.

For example, one replacement data generator may be implemented as an extended playback buffer, another replacement data generator may be implemented as a variable power white noise generator, and yet another replacement data generator may be a silence generator (each described in more detail below). The data replacement unit 406 may determine which replacement data generator to use based upon the T_i input. An echo canceller may provide T_i to indicate that connection i is a data connection (i.e., fax or MODEM), a voice connection, or another type of connection. Another example source for T_i is an SS7 unit.

As noted above, one of the distinct replacement data generators may be implemented as a variable power white noise generator, described in detail with reference to Figure 1 and 2. Turning first to Figure 1, that figure shows a Linear Feedback Shift Register (LFSR) generally indicated 100. The LFSR 100 includes a feedback network 102 which corresponds to a generator polynomial and a series of registers 104 (register 0 through register 17). The feedback network 102 in Figure 1 uses a summation node 106 that adds the contents of register 0 and register 7 and places the result in register 17. The bit stored in register 0 is used as the output bit 108.

The LFSR 100 in Figure 1 includes 18 registers 104 and implements the generator polynomial $X^{18} + X^7 + 1$. In general, any generator polynomial of the form $G(X) = g_n X^n + g_{n-1} X^{n-1} + \dots + g_1 X + g_0$ may be implemented using additional summation nodes. As will be explained below, however, primitive polynomials are preferred. The LFSR 100 produces two output sequences. One sequence, of period one, is the output sequence of all zeros generated when the initial state of each of the registers 104 is zero. The other sequence produced by the LFSR 100 (generated from any starting condition other than all zeros) is of period $2^n - 1$, where n is the number of registers 104.

The LFSR 100 and associated feedback network 102 produce a pseudo-random output of length $2^n - 1$. Each new output is generated by evaluating the new contents for register 17 and shifting the contents of the registers 104 to the left. Because the LFSR 100 output will be used to fill cells of missing data which may represent telephone conversation

samples, the length 2^n-1 is preferably long enough to prevent the sequence from repeating at a rate that creates an audible frequency component in the telephone conversation. The rate of repetition, in turn, depends unpredictably on the number of cells or frames lost over a network. The value for n is therefore typically chosen heuristically. For example, a value for n of 18 is typically acceptable, though much smaller values may be used in networks less susceptible to lost frames and cells.

Turning now to Figure 2, that figure shows the LFSR 100 connected to a multi-bit register 200. The multi-bit register 200 is shown including eight bits: a sign bit 202 and seven magnitude bits 204. The magnitude bits 204 may be connected to any general purpose data bus and provided with values between 0 and 127. If additional levels of magnitude are required, the multi-bit register 200 may be extended with additional magnitude bits. Similarly, the multi-bit register 200 may be shortened to reduce the number of magnitudes available. The multi-bit register 200 may store a sign magnitude (one's complement) binary value, for example, or may store a binary value in another predetermined format, including two's complement, A-law, or μ -law.

The output bit 108 controls whether the magnitude represented by the magnitude bits 204 will be stored as a positive or negative (signed) quantity. Because the output bit 108 is generated by the pseudo-random output of the LFSR 100, the signed quantity fluctuates between positive and negative values in a pseudo-random, uncorrelated fashion.

Thus, the contents of register 200 produce a pseudo-white noise signal whose power may be varied by modifying the contents of the magnitude bits 204. As described below, data connections (i.e., for faxes and MODEMS) are preferably maintained using an extended playback buffer. However, the magnitude bits 204 may be adjusted in accordance with L_i , for example, to provide a low level background white noise for a telephone conversation and to provide a high level background white noise to prevent a fax or MODEM from disconnecting a data connection.

For example, in the logarithmic μ -law representation that is used in North America, the samples placed on the PSTN are 8 bit samples. When using a fixed magnitude value and randomly alternating the sign bit, the maximum power defined for this signal is approximately +3 dBm0, and the minimum non-zero power is approximately -69 dBm0. Typical fax and modem equipment determines that a signal power above approximately -42 dBm0 represents a live connection. The data representing a voice call typically resides at approximately -15 to -20 dBm0 and has a noise energy level below -40 dBm0. Thus, the magnitude bits 204 may be set within a range between -69 dBm0 and -40 dBm0 for a voice call. For a data call, the magnitude bits 204 may be set above a predetermined threshold, for example, -42 dBm0, or within a range, for example between -42 dBm0 and 0 dBm0.

As noted above, one of the distinct replacement data generators may be implemented as a silence generator. One efficient mechanism for generating silence uses the structure

- 16 -

of the variable power white noise generator described above. In order to generate silence, the data replacement unit 406 ignores, makes constant, or provides a constant sign bit 202 with the magnitude bits 204. The result is a constant output value which depends on the magnitude bits 204. Silence results because a series of constant values has a predominately DC (i.e., zero frequency) component. The DC component is filtered out by the CODECS (which typically roll off in frequency response below 300 Hz and above 3400 Hz, with severe attenuation at approximately 0 Hz or DC) that convert the PSTN data to analog form for reproduction at a telephone receiver.

Yet another alternative replacement data generator may be implemented as an extended playback buffer. The playback buffer may store, for example, 512 bytes of previously correctly received packet data. The playback buffer may be flexibly located, and may be placed, for example, in the data replacement unit 406 or the data payout unit 408. Preferably, the playback buffer is located in the payout unit 408 because the extracted data D_1 to be stored in the playback buffer passes through the payout unit 408 in normal operation. Extra connections are therefore eliminated, for example, between the data extraction unit 404 and the replacement data unit 406.

The L_1 signal indicates when replacement data is to be provided by the extended playback buffer. As an example, the extended playback buffer may be used for data connections including fax and MODEM connections for example, as determined

- 17 -

by an echo canceller. In response, the extended playback buffer preferably provides replacement data starting with the oldest data packet stored in the playback buffer and proceeding to the most recently stored data packet. Thus, there is no repetition of replacement data unless more bytes are lost than can be stored in the playback buffer. An extended playback buffer, for example, 512 bytes in length provides a much richer frequency representation (approximating the frequency content of the original signal) than past schemes which repeat a much smaller buffer, for example, one packet, over and over. The extended playback buffer also reduces the probability of introducing false frequencies for even extended losses of data.

Turning to Figure 3, that figure shows one configuration 300 of variable power white noise generators used to provide replacement data for multiple independent connections. The configuration 300 includes a series of multi-bit registers 304 connected to an LFSR 306, a register control 308, and a multiplexer 310. The interworking components shown in Figure 3 may, for example, be included in the data replacement unit 406.

As noted above, an interworking function provides a mechanism by which data is delivered to the destination PSTN from a dissimilar network (for example, an ATM network). As one example, the interworking function 400 may interface to a destination PSTN T1 line that carries multiple voice or data connections using 24 Time Division Multiplex time slots. Because data may be lost in the ATM network for any

conversation that will be routed to the destination PSTN, the interworking function 400 may include a series of multi-bit registers 304 that replace the missing data for any time slot with white noise of power appropriate for the application using that time slot. Furthermore, the power output of the white noise generated by each multi-bit register 304 may be adjusted independently. Although Figure 3 specifically shows an example of multiple variable power white noise generators, it is noted that multiple copies of each replacement data generator may be provided additionally or alternatively.

Thus, each register 304 may hold replacement data for a connection. The power level stored in each register 304 is preferably set for the duration of the connection. Additionally, each register, and therefore each connection, may be set to an independent power level by modifying the magnitude bits in each register.

A single LFSR 306 may provide the pseudo-random output controlling the positive and negative sense of each signed quantity stored in each of the multi-bit registers 304. Alternately, additional independent LFSRs may be connected to subsets of the multi-bit registers 304. In each instance where a frame or cell of data is missing, the multi-bit register 304 assigned to the outgoing time slot (coordinated by the multiplexer 310) may be used to generate white noise samples to replace the data in the missing frame or cell. The LFSR 306 may then be shifted (once for every byte of replacement data output) to produce a new pseudo-random output stored in the sign bit of each register 304. Missing cells

are detected by the lost packet detection unit 402. The lost packet detection unit 402, as noted above, may function by monitoring sequence numbers of incoming frames or cells and detecting a missing sequence number or by other means.

5 The register controller 308 independently adjusts the magnitude portions of the multi-bit registers 304 and may function under general micro-controller and programmed control. As noted above, the magnitude of the multi-bit registers 304 may be adjusted, for example, depending on the
10 desired output power level of the white noise. Adjustment typically occurs at call setup. One power level may be used for fax and MODEM calls, for example, while another power level may be used for voice data. Adjustment may occur after
15 call setup, for example, based on measured signal values.

15 The determination of call type (e.g., fax or voice) may come from header and control information provided in previous frames or cells of data. In many instances, however, an echo
20 canceller will be installed in or with the interworking equipment 300. The echo canceller very closely monitors the call data to determine the type of call and corresponding echo
25 cancellation properties. Preferably, therefore, the echo canceller provides an output that indicates the call type during its normal course of operation.

 A variety of techniques may be used to implement the LFSR
25 100 and multi-bit register 200. For example, flip flops, SRAM cells, or DRAM cells may form the basic building blocks for the LFSR 100 and multi-bit register 200. In addition, discrete logic, PLDs, or custom VLSI designs may be used to

create the white noise generator of the present invention, including multiple LFSRs and multi-bit registers.

While particular elements, embodiments and applications of the present invention have been shown and described, it is understood that the invention is not limited thereto since
5 modifications may be made by those skilled in the art, particularly in light of the foregoing teaching. It is therefore contemplated by the appended claims to cover such modifications as incorporate those features which come within
10 the spirit and scope of the invention.

What is claimed is:

1. A method for generating variable power white noise for data replacement in a packet network, the method comprising:
storing a magnitude in a multi-bit register;
generating a pseudo-random sign bit; and
combining the sign bit with the magnitude to produce an output value.
2. The method of claim 1, wherein the step of generating comprises evaluating a feedback network and shifting a linear feedback shift register.
3. The method of claim 2, wherein the step of storing comprises storing a magnitude corresponding to an absolute energy level above a predetermined threshold for a data call.
4. The method of claim 2, wherein the step of storing comprises storing a magnitude corresponding to an absolute energy level within a predetermined range for a data call.
5. The method of claim 2, wherein the step of storing comprises storing a magnitude corresponding to an absolute energy level within a predetermined range for a voice call.
6. The method of claim 1, further comprising the step of multiplexing the output value onto a destination network.
7. The method of claim 2, wherein the step of evaluating a feedback network comprises evaluating a primitive polynomial feedback network.

- 22 -

8. A variable power white noise generator comprising:
a multi-bit register storing a signed quantity in a predetermined format representing a magnitude with a sign;
a linear feedback shift register connected to a sign bit in the multi-bit register, the linear feedback shift register including an output bit determining the sign of the magnitude;
a feedback network connected to the linear feedback shift register, the feedback network implementing a generator function; and
a register control including an output for storing the magnitude in the multi-bit register.
9. The variable power white noise generator of claim 8, further comprising a lost packet detection unit including a lost data output.
10. The variable power white noise generator of claim 8, further comprising at least one additional multi-bit register storing a signed quantity in a predetermined format representing a magnitude with a sign, and wherein the linear feedback shift register is further connected to the sign bit of the additional multi-bit register to control the sign of the magnitude stored in the additional multi-bit register.
11. The variable power white noise generator of claim 10, further comprising a multiplexer for sequentially providing as output the signed quantity of each of the multi-bit registers.
12. The variable power white noise generator of claim 10, wherein the output of the register control independently controls each of the multi-bit registers.
13. A method for replacing lost PSTN data in a packet

network, the method comprising the steps of:

receiving data packets from a packet network;

detecting lost data packets and producing in response a lost data output indicating when replacement data needs to be provided;

removing overhead information from the data packets to produce output data;

storing a plurality of output data in an extended playback buffer;

generating duplicate replacement data using the extended playback buffer, the duplicate replacement data starting with the oldest output data stored in the extended playback buffer;

placing the duplicate replacement data on an external network when the lost data output indicates replacement data needs to be provided and placing the output data on the external network otherwise.

14. The method of claim 13, further comprising the steps of generating white noise replacement data using at least one variable power white noise generator, each variable power white noise generator producing the replacement data by the steps of:

using a linear feedback shift register to control a sign bit of a multi-bit register;

and storing a magnitude in the multi-bit register; outputting the sign bit and magnitude as the replacement data; and

shifting the linear feedback shift register when a new replacement data value is needed; and

providing a replacement data selection signal indicating a type of replacement data to be provided when the lost data output indicates that replacement data needs to be provided; and

and wherein the placing step responds to the replacement data selection signal by placing white noise replacement data or duplicate replacement data on the

external network.

15. The method of claim 14, further comprising the step of
generating silence replacement data and wherein the
5 placing step responds to the replacement data selection
signal by placing white noise replacement data, duplicate
replacement data, or silence replacement data on the
external network.

10 16. An method for replacing lost PSTN data in a packet
network, the method comprising the steps of:
receiving data packets from a packet network;
detecting lost data packets and producing in
15 response a lost data output indicating when replacement
data needs to be provided;
removing overhead information from the data packets
to produce output data;
generating white noise replacement data using at
20 least one variable power white noise generator, each
variable power white noise generator producing the
replacement data by the steps of:
using a linear feedback shift register to
control a sign bit of a multi-bit register;
and storing a magnitude in the multi-bit
25 register;
outputting the sign bit and magnitude as the
replacement data; and
shifting the linear feedback shift register
when a new replacement data value is needed; and
30 placing the white noise replacement data on an
external network when the lost data output indicates
replacement data needs to be provided and placing the
output data on the external network otherwise.

35 17. The method of claim 16, further comprising the steps of:
storing a plurality of output data in an extended
playback buffer;

generating duplicate replacement data using the extended playback buffer, the duplicate replacement data starting with the oldest output data stored in the extended playback buffer;

5 providing a replacement data selection signal indicating a type of replacement data to be provided when the lost data output indicates that replacement data needs to be provided; and

10 and wherein the placing step responds to the replacement data selection signal by placing white noise replacement data or duplicate replacement data on the external network.

15 18. The method of claim 16, further comprising the step of generating silence replacement data and wherein the placing step responds to the replacement data selection signal by placing white noise replacement data or silence replacement data on the external network.

20 19. The method of claim 17, further comprising the step of generating silence replacement data and wherein the placing step responds to the replacement data selection signal by placing white noise replacement data, duplicate replacement data, or silence replacement data on the
25 external network.

FIG. 1

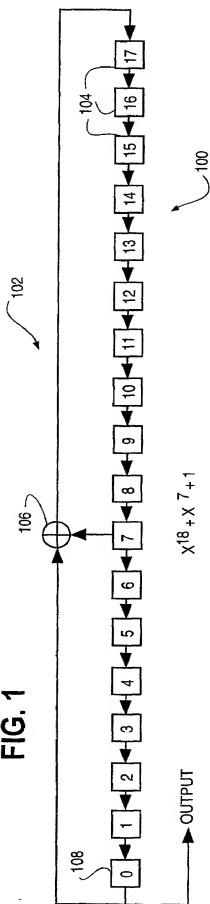


FIG. 2

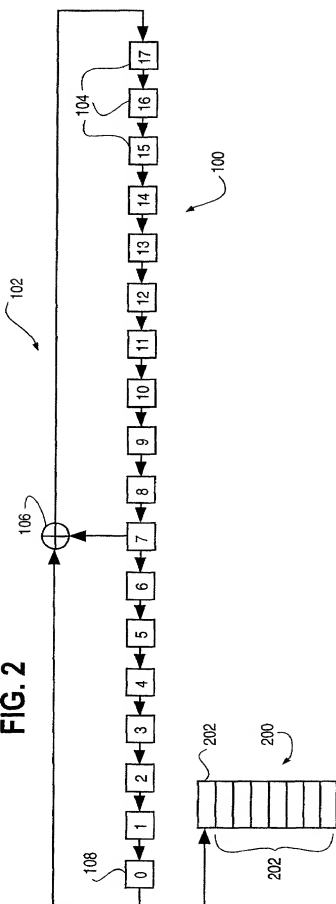


FIG. 3


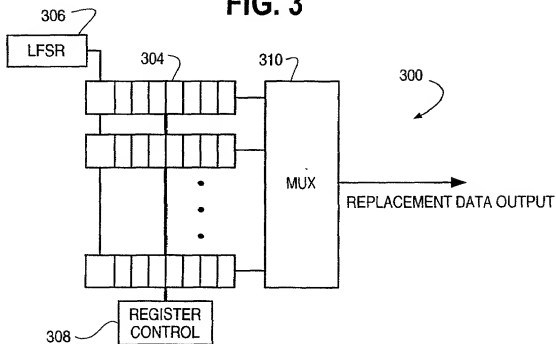


FIG. 4

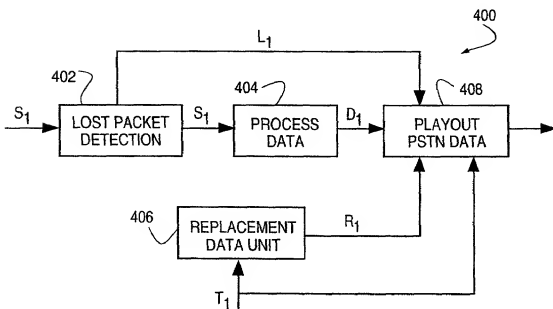

**COMBINED DECLARATION AND
POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

**METHOD AND APPARATUS FOR REPLACING LOST PSTN DATA IN A PACKET
NETWORK**

the specification of which was filed May 31, 2001, as Serial No. 09/857,096.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year Filed</u>	<u>Is Priority Claimed?</u>
PCT/US99/28801	PCT	3 December 1999	yes

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Serial No. Filing Date

Patented, Pending, or Abandoned?

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

George P. McAndrews	Reg. No. <u>22,760</u>
John J. Held	Reg. No. <u>21,061</u>
Timothy J. Malloy	Reg. No. <u>25,600</u>
William M. Wesley	Reg. No. <u>26,521</u>
Lawrence M. Jarvis	Reg. No. <u>27,341</u>
Gregory J. Vogler	Reg. No. <u>31,313</u>
Jean Dudek Kuelper	Reg. No. <u>30,171</u>
Herbert D. Hart III	Reg. No. <u>30,063</u>
Robert W. Fieseler	Reg. No. <u>31,826</u>
D. David Hill	Reg. No. <u>35,543</u>
Thomas J. Wimbiscus	Reg. No. <u>36,059</u>
Steven J. Hampton	Reg. No. <u>33,707</u>
Priscilla F. Gallagher	Reg. No. <u>32,223</u>
Stephen F. Sherry	Reg. No. <u>30,590</u>
Patrick J. Arnold Jr.	Reg. No. <u>37,769</u>
George Wheeler	Reg. No. <u>28,766</u>
Janet M. McNicholas	Reg. No. <u>32,918</u>
Ronald E. Larson	Reg. No. <u>24,478</u>
Christopher C. Winslade	Reg. No. <u>36,308</u>
Edward A. Mas II	Reg. No. <u>37,179</u>
Gregory C. Schodde	Reg. No. <u>36,668</u>
Edward W. Remus	Reg. No. <u>25,703</u>
Donald J. Pochopien	Reg. No. <u>32,167</u>
Sharon A. Hwang	Reg. No. <u>39,717</u>
David D. Headrick	Reg. No. <u>40,642</u>
Dean D. Small	Reg. No. <u>34,730</u>
Alejandro Menchaca	Reg. No. <u>34,389</u>
Kirk A. Vander Leest	Reg. No. <u>34,036</u>
Richard T. McCaulley, Jr.	Reg. No. <u>41,977</u>
Anthony E. Dowell	Reg. No. <u>39,661</u>
Peter J. McAndrews	Reg. No. <u>38,547</u>
Jonathan R. Sick	Reg. No. <u>43,920</u>
Eligio C. Pimentel	Reg. No. <u>42,076</u>
James P. Murphy	Reg. No. <u>40,741</u>
Dean A. Pelletier	Reg. No. <u>45,007</u>
Michael B. Harlin	Reg. No. <u>43,658</u>
James R. Nuttall	Reg. No. <u>44,978</u>
Jeffrey D. Wheeler	Reg. No. <u>39,066</u>
Timothy L. Hamey	Reg. No. <u>38,174</u>
Joseph M. Barich	Reg. No. <u>42,291</u>
Scott P. McBride	Reg. No. <u>42,853</u>
Patricia J. McGrath	Reg. No. <u>44,919</u>
Sandra A. Frantzen	Reg. No. <u>48,799</u>
Christopher V. Carani	Reg. No. <u>44,049</u>
Jennifer E. Lacroix	Reg. No. <u>46,852</u>

50

Joseph F. Harding
Joseph M. Butscher
Stephen M. Miller
Troy A. Groetken
Michael J. Fitzpatrick

Reg. No. P-48,450
Reg. No. P-48,326
Reg. No. 40,728
Reg. No. 46,442
Reg. No. P-48,510

Address all telephone calls to Ronald E. Larson at telephone number:

(312) 775-8119.

Address all correspondence to:

McAndrews, Held & Malloy, Ltd.
34th Floor
500 W. Madison Street
Chicago, Illinois 60661

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

This declaration names 3 inventors below.

Information about sole or first inventor:

(given name, family name):

Residence:

John B. Kenney

17658 Stockbridge Lane
Granger, IN 46530

Citizenship:

Post Office Address:

U.S.A.

Same

First inventor's signature:

Date Signed:

John B. Kenney
June 25, 2001

(given name, family name):

Residence:

Citizenship:

Post Office Address:

2-0
Robert B. Magill

54750 Bonnet Hill Trail

Mishawaka, IN 46545

U.S.A.

Same

Second inventor's signature:

Date Signed:

Robert B. Magill

6/19/01

(given name, family name):

Residence:

Citizenship:

Post Office Address:

3-0
R. Michael Schafer

17681 Stockbridge Lane

Granger, IN 46530

U.S.A.

Same

Third inventor's signature:

Date Signed:

R. Michael Schafer

6/19/2001